






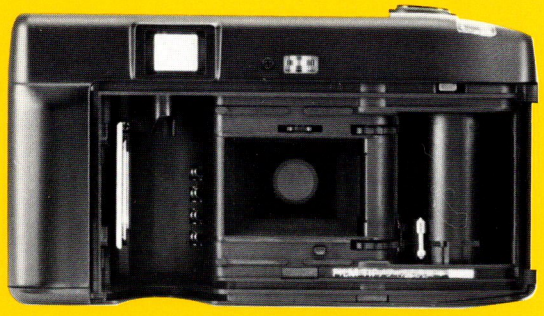

Nikon One-Touch

Product number:	1805
Type of camera:	Autofocus, compact camera with macro focus range and automatic flash backlight compensation (smart flash)
Picture format:	24mm x 36mm (standard 35mm format)
Lens:	Nikon 35mm f/2.8 lens; 4 elements in 3 groups
Filter:	46mm dia. threaded mount provided at front of lens
Shutter:	Programmed, electronic in-lens shutter
Viewfinder:	Bright-frame viewfinder; magnification 0.5x
Field of view:	Approximately 85% frame coverage at infinity
Viewfinder information:	Bright frame with parallax compensation marks, autofocus frame marks, display for correct focusing (green LED), flash-ready indicator (red LED); battery check and "too-near-subject" warning also provided
Focusing:	16-step, infrared, active autofocus system; 0.5m 17″ to infinity
Focus memory:	By pressing the shutter release
Exposure metering:	Two CdS cells; one for the programmed, automatic exposure system and one for automatic flash backlight compensation (smart flash)
Metering range:	EV6.4 to EV17 (f/2.8 at 1/11 sec. to f/16 at 1/500 sec.) with ISO 100 film
Film speed setting:	Automatic for DX-coded films; set to ISO 100 for non-DX
Film speed range:	ISO 64 to 1600
Film loading/advance:	Auto film loading with film automatically advanced to first frame
Frame counter:	Additive type; resets when camera back is opened; counts backwards as film is being rewound
Film rewind:	Automatically at end of film roll; film rewind stop automatic as film leader leaves sprockets
Electronic flash:	Automatic functions are available, as follows: * Flash in case of insufficient light * Flash dimmer for distances less than 0.7m (2.3 ft.) * Flash backlight compensation * Shutter locks until flash is fully charged * Flash cancel button for photographs without flash Charging time about 3 sec.
Flash range:	0.45-4m (1.5-14.8 ft.), ISO 100 film
Self-timer:	Via self-timer; 10 sec. shutter release delay with indicator light
Battery check:	Approximately 5 years (ten 24-exposure rolls per year with 30% flash usage); shutter release locks when battery is exhausted
Power source:	Lithium battery pack (Duracell DL223A 6V or Panasonic BR-P2 6V)
Dimensions:	135.8mm (W) x 71.5 (H) x 48mm (D) (5.3″x2.8″x1.9″)
Optional accessories:	Pouch Case for Tele-Touch Deluxe/ One-Touch/Fun-Touch